



FICHE TECHNIQUE

SONORE

Puissance sonore	122 dB (A) à 1 m
Types de sons	Tonalités et messages vocaux
Nombre de sons en standard	49
Nombre de sons personnalisables	Jusqu'à 128
Durée des messages	Illimitée
Synchronisation	Oui
Format fichiers	WAV

OPTIQUE

Technologie	LED RGB
Intensité lumineuse	38 cd (mode continu)
Modes de fonctionnement	Fixe, clignotant, flash
Sélection couleur	Par micro switch

RADIO

Bande de fréquence	868 MHz
Modulation	LoRa
Norme	ETSI EN300 220
Fonction répéteur	Oui
Topologie du réseau	Maillé
Antenne intégrée	Oui
Portée en champ libre	Jusqu'à 1,2 km
Equipements max. sur le réseau	128


ÉLECTRIQUE

Alimentation principale	100 – 240 Vca 50/60 Hz
Consommation en diffusion	0,8 A / 115 Vca 0,4 A / 230 Vca
Consommation en veille	0,03 A
Entrée de déclenchement	x 1
Borniers	24 - 12 AWG / 0,205 - 3,31 mm ²
Batterie	12 V - 0.8 Ah - Plomb


MÉCANIQUE

Dimensions	240 x 155 x 73 mm
Poids	2,2 kg (avec batterie)
Perçages pour entrées de câbles	2 pré-découpes
Indice de protection	IP 3X
Température d'utilisation	-25°C à +55°C
Humidité relative	10 - 85 %
Matériau	ABS UL94 V-0

DIMENSIONS (en mm)

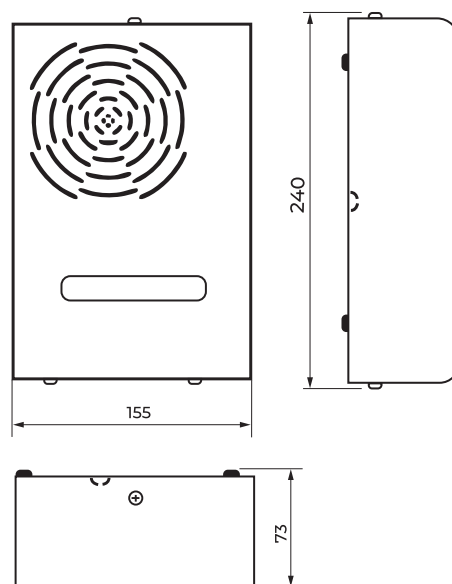




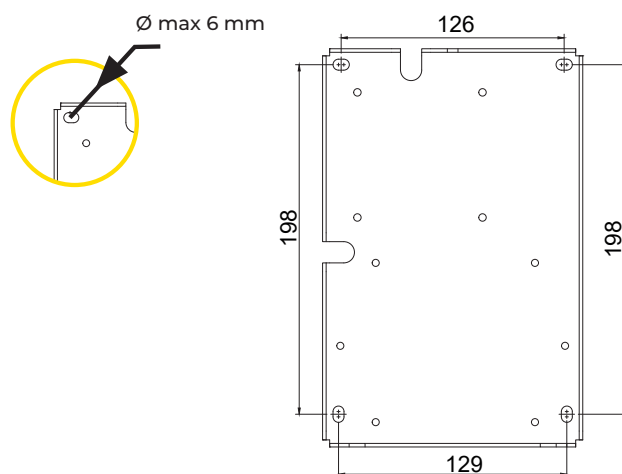












































ENTRAXES DE PERÇAGE (en mm)



RÉFÉRENCES

Version standard	230 Vca	SVI230AW
Version tropicalisée	230 Vca	SVI230TW

TABLEAU DES SONS INCLUS EN STANDARD

1	340Hz Continuous		26	Bell	
2	800-1000Hz @ 0.25 sec Alternating		27	554Hz Continuous	
3	500-1200Hz @ 0.3Hz 0.5 sec Slow Whoop		28	440Hz Continuous	
4	800-1000Hz @ 1Hz Sweeping		29	800-1000Hz @ 7Hz Sweeping	
5	2400Hz Continuous		30	300Hz Continuous	
6	2400-2900Hz @ 7Hz Sweeping		31	660-1200Hz @ 1Hz Sweeping	
7	2400-2900Hz @ 1Hz Sweeping		32	Two T Chime	
8	500-1200-500Hz @ 0.3Hz Sweeping		33	745Hz @ 1Hz Intermittent	
9	1200-500Hz @ 1Hz DIN - PFEER PTAP		34	1000 and 2000Hz @ 0.5s Alternating - Singapore	
10	2400-2900Hz @ 2Hz Alternating		35	420Hz @ 0.625s Australian Alert	
11	1000Hz @ 1Hz Intermittent		36	500-1200Hz 3.75s-0.25s Australian Evac	
12	800-1000Hz @ 0.875Hz Alternating		37	1000Hz Continuous - PFEER Toxic Gas	
13	2400Hz @ 1Hz Intermittent		38	2000Hz Continuous	
14	800Hz 0.25s on 1s off Intermittent		39	800Hz 0.25s on 1s off Intermittent	
15	800Hz Continuous		40	544Hz 100ms - 440Hz 400ms NFS 32-001	
16	660Hz 150ms on 150ms off Intermittent		41	Motor Siren - slow rise to 1200Hz	
17	544Hz 100ms - 440Hz 400ms NFS 32-001		42	Motor Siren - slow rise to 800Hz	
18	660Hz 1.8s on 1.8s off Intermittent		43	1200 Hz Continuous	
19	1.4KHz-1.6KHz 1s 1.6KHz-1.4KHz 0.5s NFC48-265		44	Motor Siren - slow rise to 2400Hz	
20	660Hz Continuous		45	1KHz 1s on 1s off Intermittent - PFEER General alarm	
21	554Hz-440Hz @ 1Hz Alternating		46	French - Signal national alerte	
22	544Hz @ 0.875s Intermittent		47	French - Signal national fin alerte	
23	800Hz @ 2Hz Intermittent		48	French - Signal national essai	
24	800-1000Hz @ 50Hz Sweeping		49	Alarme menace NF S61-942	
25	2400-2900Hz @ 50Hz Sweeping	