

1-BUTTON AND 4-BUTTON REMOTE CONTROLS

SRxxx



INSTALLATION


AND OPERATING

MANUAL

TECHNICAL CHARACTERISTICS


- Radio
- Frequency band 868 MHz
- Modulation LoRa
- Standard ETSI EN300 220
- Repeater No
- Built-in aerial Yes
- Range Up to 1.2 km
- Electrical
- Battery CR2477N (ref. SA007 – included)
- Configuration Via USB cable – Jack (ref. SA006 – optional)
- Battery life at 20°C 5 years (SRxAx versions)
- Mechanical
- Dimensions 90 x 44.5 x 22 mm
- Weight 55 g
- Ingress protection P66
- Indicator 1 × tri-colour LED

REFERENCES

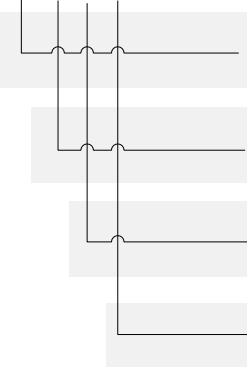
SR xxx	VARIABLE	DESCRIPTION
	SR	SmartVOX® radio remote control
	1 4	1 button 4 buttons
	A X	Standard version Custom version – contact ae&t
	W B	White enclosure Black enclosure – contact ae&t

1 CONFIGURATION

CONNECT THE REMOTE CONTROL TO THE COMPUTER (Windows)

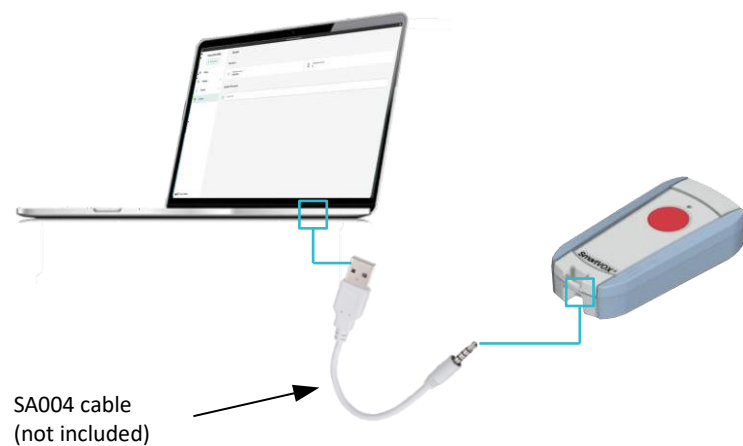

2 CONFIGURATION DOWNLOAD AND LAUNCH THE SMARTVOX-CONFIG APPLICATION

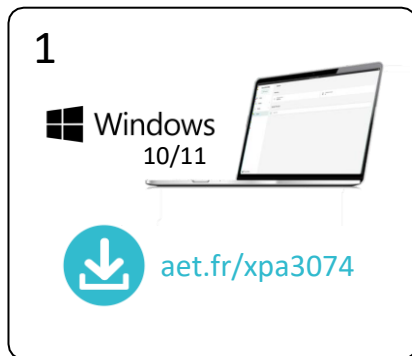

3 CONFIGURATION CUSTOMISE THE REMOTE CONTROL

For configuration instructions, refer to the SmartVOX® general manual


- Adjust the radio settings: the settings must be identical on all SmartVOX® devices on the network.
- Add the sounds and messages to be broadcast to the sound library.
- Rename the remote control
- Configure the scenarios for each button



aet.fr/xpa3074


4 USE

- Activate a scenario



Indicator	
	Pre-activation
	Scenario activated

- Check the battery status



Indicator	
	Green: Battery OK
	Red: Battery needs changing

5 MAINTENANCE: CHANGE THE BATTERY

- ae&t battery reference number: SA007 (= CR2477N battery + VC11L-804-R5 loop fastener)
- The configuration of the remote control is retained when the batteries are replaced

